


Lifting Sling Capacities (WLL) in LBS

Rigger's Choice® Chain Slings Capacities Grade 80

		2-Leg & Basket			3 and 4 Leg				
Inch	mm	90° Vertical	Choker > 30°	60°	45°	30°	60°	45°	30°
9/32	7	3,500	2,600	6,100	4,900	3,500	9,100	7,400	5,200
5/16	8	4,500	3,400	7,700	6,400	4,500	11,700	9,500	6,800
3/8	10	7,100	5,320	12,300	10,000	7,100	18,400	15,100	10,600
1/2	13	12,000	9,000	20,800	17,000	12,000	31,200	25,500	18,000
5/8	16	18,100	13,570	31,300	25,600	18,100	47,000	38,500	27,100
3/4	19	28,300	21,220	49,000	40,000	28,300	73,500	60,000	42,400
7/8	22	34,200	25,650	59,200	48,400	34,200	88,900	72,500	51,300
1	26	47,700	35,700	82,600	67,400	47,700	123,900	101,200	71,500
1-1/4	32	72,300	54,200	125,200	102,200	72,300	187,800	153,400	108,400

Capacities as per ASME B 30.9

Chain Inspection

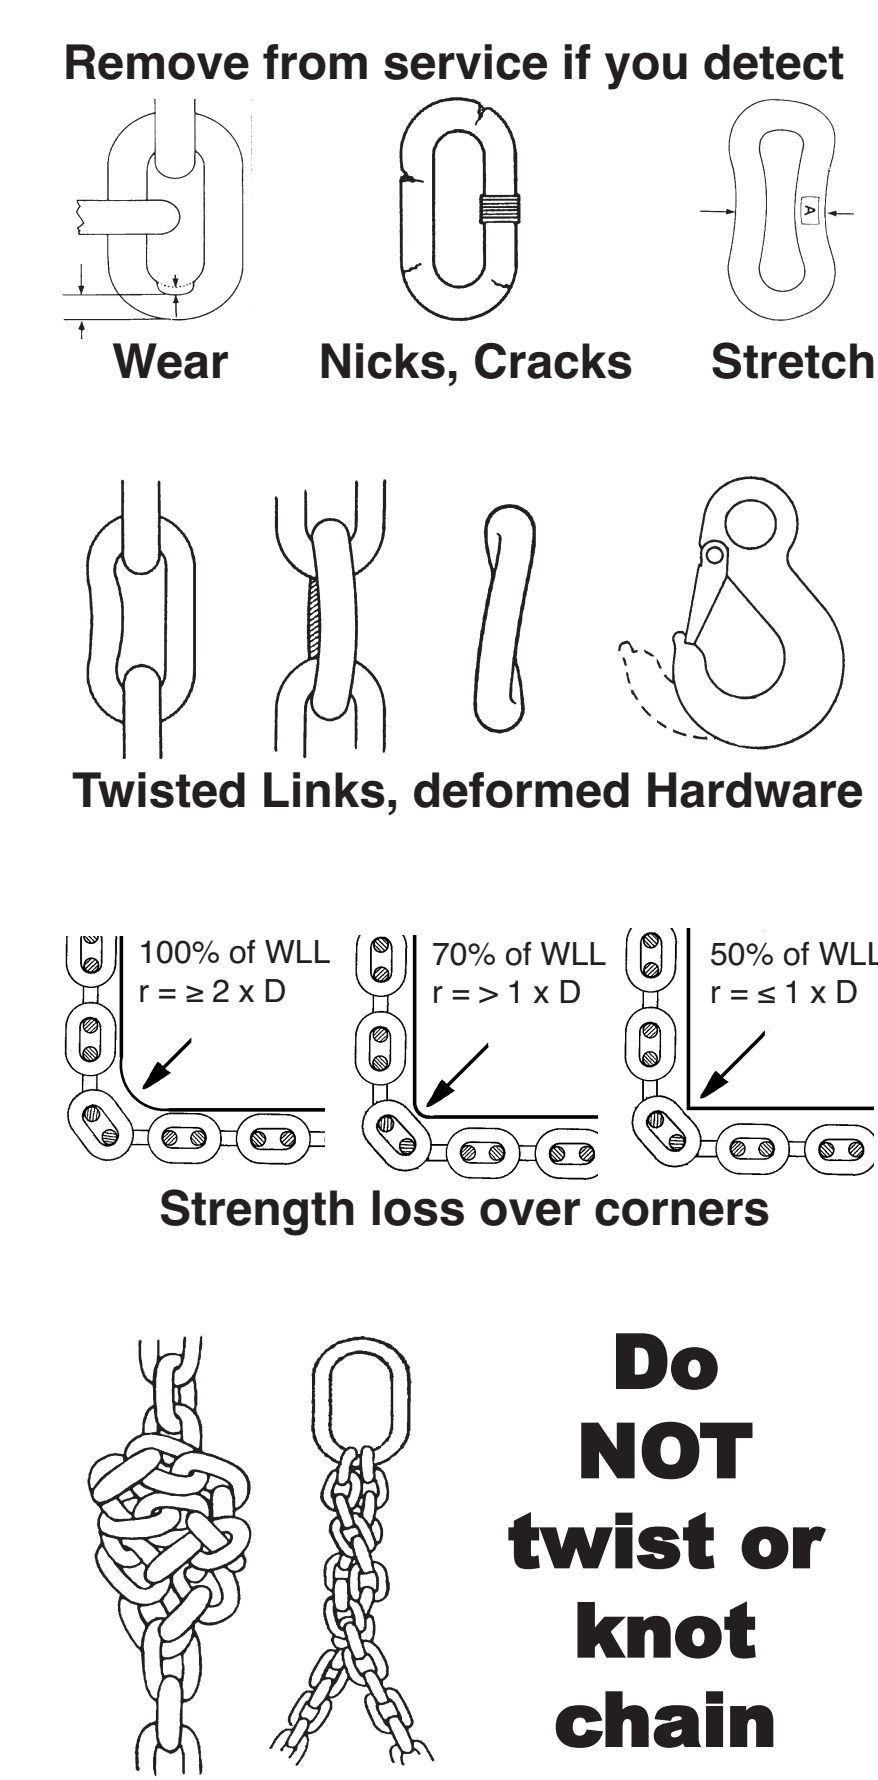

Rigger's Choice® Chain Slings Capacities Grade 100

		2-Leg & Basket			3 and 4 Leg				
Inch	mm	90° Vertical	Choker > 30°	60°	45°	30°	60°	45°	30°
7/32	6	3,100	2,300	5,400	4,400	3,100	8,100	6,600	4,700
5/16	8	5,700	4,300	9,900	8,100	5,700	14,800	12,100	8,500
3/8	10	8,800	6,600	15,200	12,400	8,800	22,900	18,700	13,200
1/2	13	15,000	11,300	26,000	21,200	15,000	39,000	31,800	22,500
5/8	16	22,600	17,000	39,100	32,000	22,600	58,700	47,900	33,900
3/4	19	35,300	26,500	61,100	49,900	35,300	91,700	74,900	53,000
7/8	22	42,700	32,000	74,000	60,400	42,700	110,900	90,600	64,000
1	26	59,700	44,800	103,200	84,200	59,700	155,100	126,600	89,600

Capacities as per ASME B 30.9



Ontario **1.800.457.9997**

Alberta **1.780.644.9000**


Quebec **1.877.239.5444**

TWIN PATH® Lifting Slings


Code No.	Approx. Width Inch	90° Vertical	Choker Hitch	2 Sling or Basket Hitch		
				60°	45°	30°
2500	4	25,000	20,000	43,300	35,350	25,000
3000	4	30,000	24,000	51,900	42,400	30,000
4000	5	40,000	32,000	69,200	56,560	40,000
5000	5	50,000	40,000	86,500	70,700	50,000
6000	6	60,000	48,000	103,800	84,840	60,000
7000	6	70,000	56,000	121,200	98,980	70,000
8500	6	85,000	68,000	147,100	120,190	85,000
10000	8	100,000	80,000	173,100	141,400	100,000
12500	8	125,000	---	216,300	176,750	125,000
15000	10	150,000	---	252,600	212,100	150,000
25000	11	250,000	---	432,700	353,500	250,000
30000	12	300,000	---	519,200	424,200	300,000
40000	15	400,000	---	629,820	565,600	400,000

Capacities as per CI 1905

Inspection

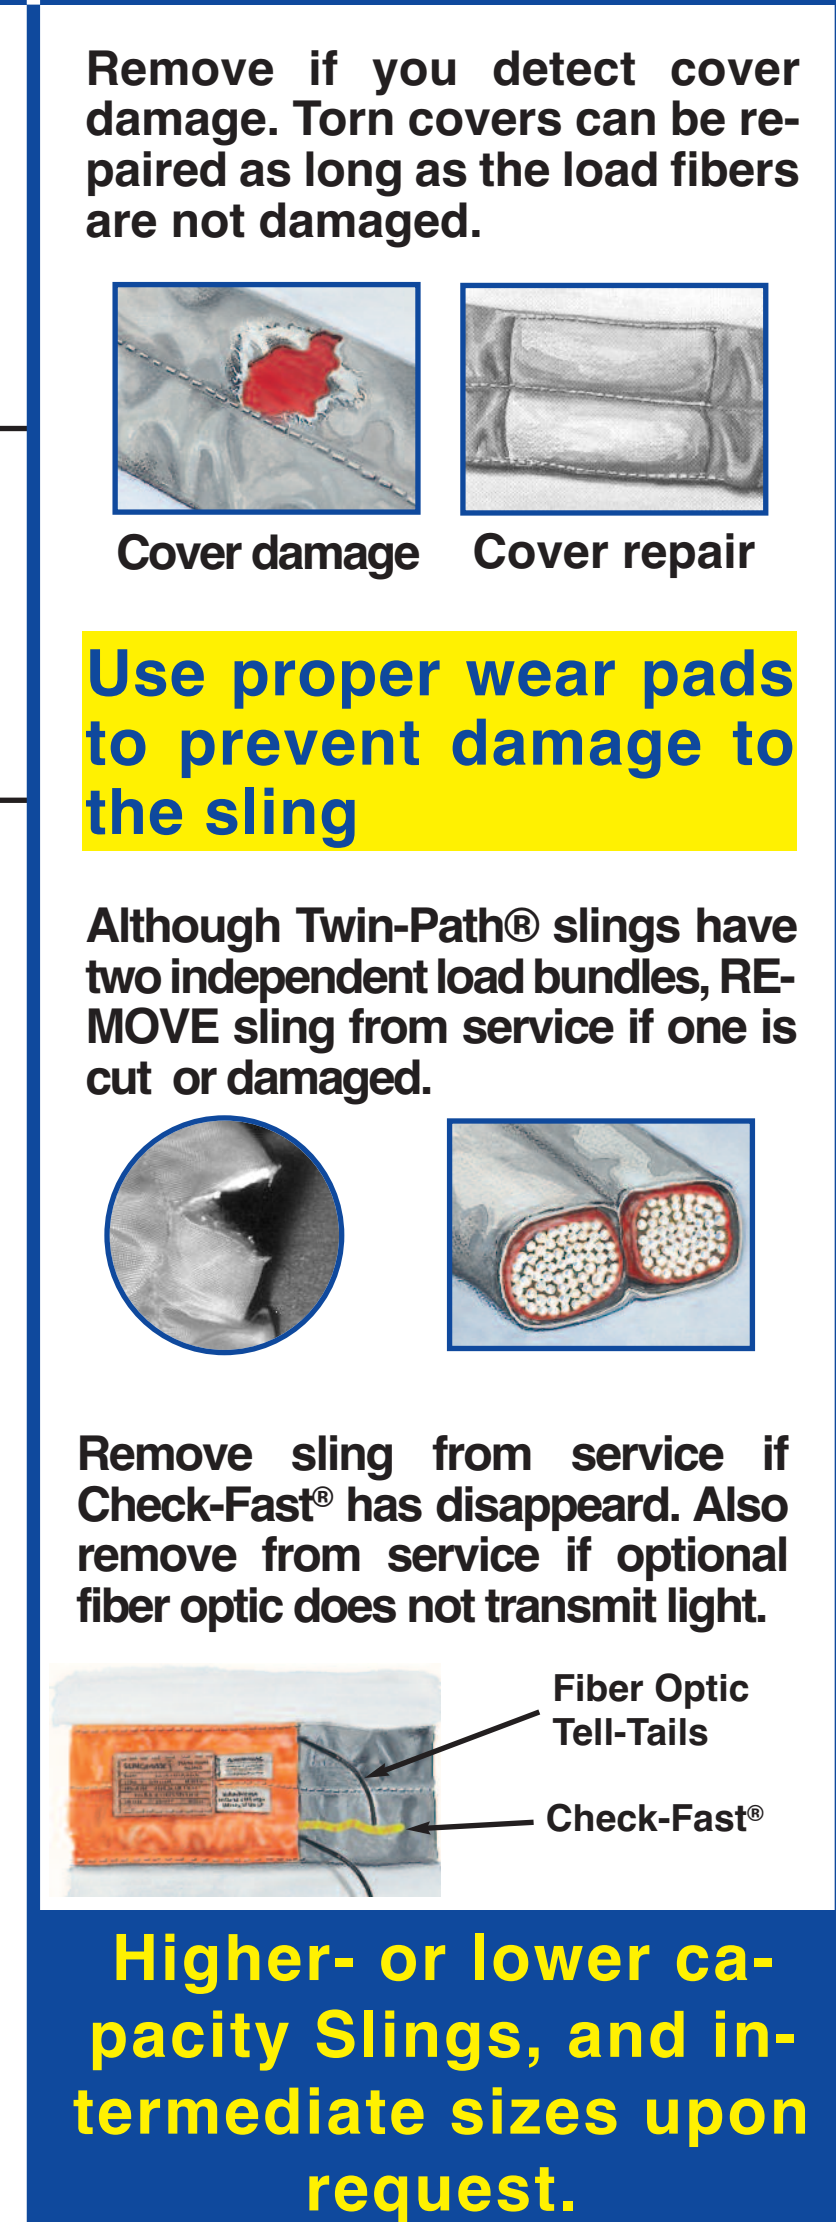

Cut Protection

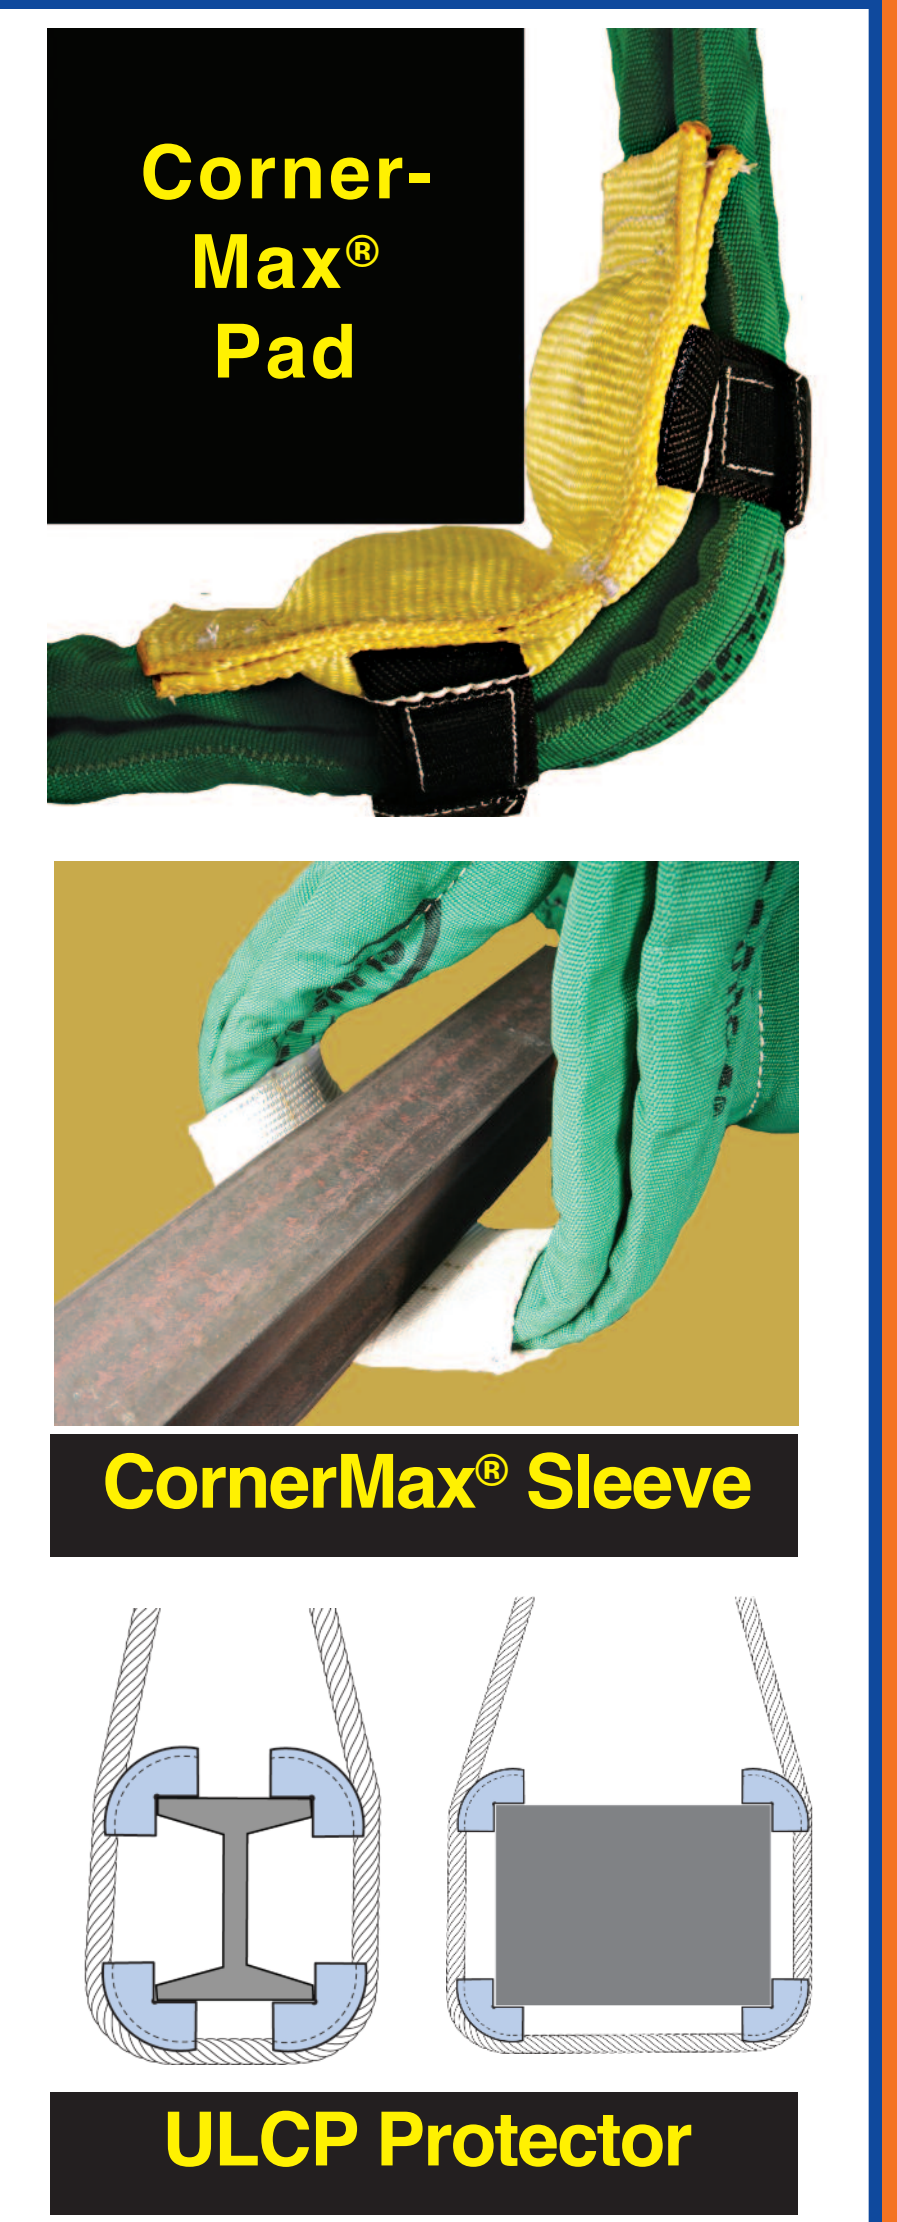

UNI WEB® Nylon and Polyester Web Slings

TypeTC/TT with Triangles				TypeEN endless					
Width Inch	90° Vertical	Choker Hitch	90° Basket	Width Inch	90° Vertical	Choker Hitch	90° Basket		
1	1-ply	1,600	1,280	3,200	1	1-ply	3,200	2,560	6,400
2	1-ply	3,100	2,480	6,200	2	1-ply	6,200	4,960	12,400
3	1-ply	4,700	3,760	9,400	3	1-ply	9,400	7,520	18,800
4	1-ply	6,200	4,960	12,400	4	1-ply	12,400	9,920	24,800
6	1-ply	9,300	7,440	18,600	6	1-ply	18,600	14,880	37,200
1	2-ply	3,100	2,480	6,200	1	2-ply	6,200	4,960	12,400
2	2-ply	6,200	4,960	12,400	2	2-ply	12,400	9,920	24,800
3	2-ply	8,800	7,000	17,600	3	2-ply	17,600	14,000	35,200
4	2-ply	11,000	8,800	22,000	4	2-ply	22,000	17,600	44,000
6	2-ply	16,500	13,200	33,000	6	2-ply	33,000	26,400	66,000


Use proper wear pads to prevent the sling from being cut by edges and corners. Slings are available up to 12" width and 4-ply. Capacities as per ASME B30.9

UNI-LOC® Wire Rope Slings

Steel Core Rope d	2 slings or 2-Leg Bridle		
	90° Vertical	Choker	Basket
1/4"	1,300	960	2,600
3/8"	2,800	2,200	5,600
1/2"	5,000	3,800	10,000
5/8"	7,800	5,800	15,600
3/4"	11,200	8,200	22,400
7/8"	15,200	11,200	30,400
1"	19,900	14,400	39,200
1-1/8"	24,000	18,200	48,000
1-1/4"	30,000	22,000	60,000
1-3/8"	36,000	26,000	72,000
1-1/2"	42,000	32,000	84,000
1-3/4"	56,000	42,000	112,000
2"	74,000	56,000	148,000

Capacities as per ASME B30.9

Inspection

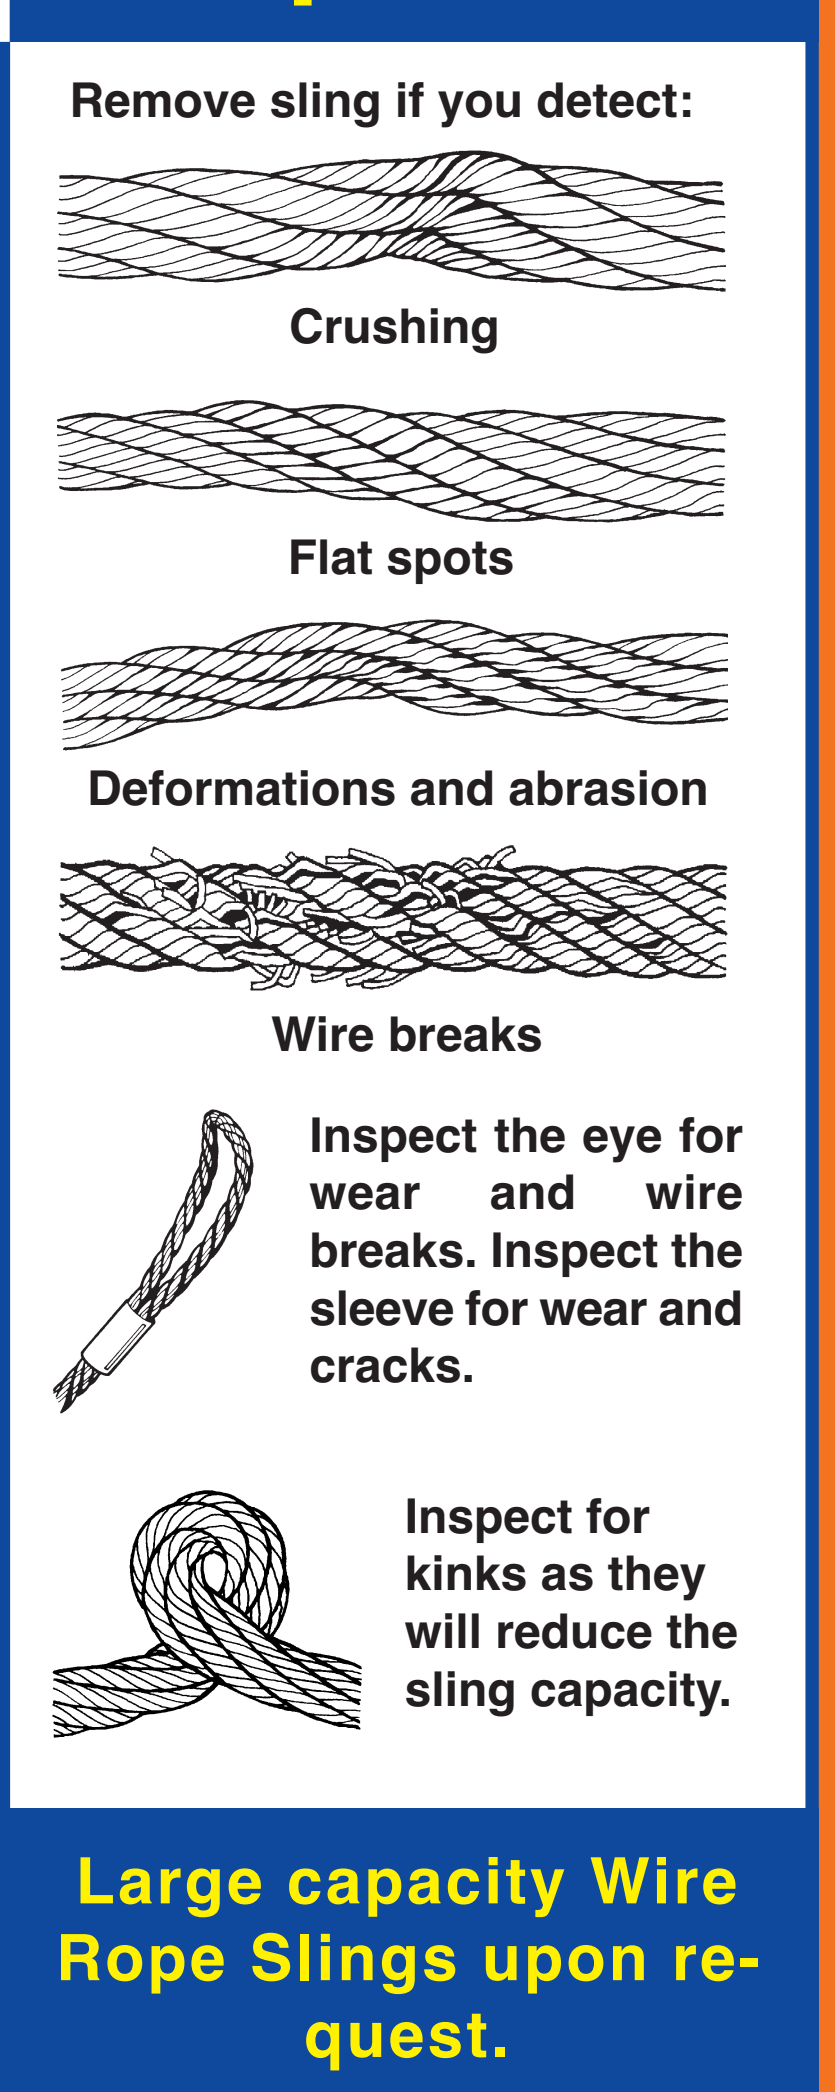

For Inspection, Re-Certification, Product Information, and Technical Services go to

www.unirop.com