

Lifting & Spreader Beams


Model 18 – Fixed Twin Basket Sling Lifting Beam



QUICKSHIP PROGRAM

PRODUCT FEATURES:

- Designed to be used with slings in a basket hitch.
- Provides greatest clearance in low headroom applications.
- Two sets of bent bar hooks are standard on units with a spread of 6' and greater.
- Spread 2 is 1/2 of spread 1.
- Hooks are designed to handle up to a 2" sling eye width.
- Complies with ASME standards.

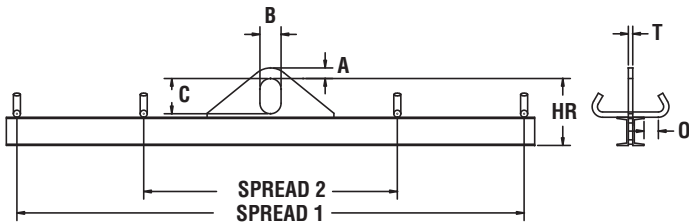

SPECIFICATIONS

| Capacity (tons) | Model Number HR Headroom (in.) Weight (lbs.) | Spread (feet) | | | | | | Other Dimensions (in.) |
|-----------------|--|-------------------|-------------------|-------------------|-------------------|------------------|------------------|------------------------|
| | | 3* | 4* | 6 | 8 | 10 | 12 | |
| 1/2 | Model Number | 18-1/2-3 | 18-1/2-4 | 18-1/2-6 | 18-1/2-8 | 18-1/2-10 | 18-1/2-12 | A=7/8 T=3/4 |
| | HR Headroom | 8-1/2 | 8-1/2 | 8-1/2 | 8-1/2 | 8-1/2 | 9-1/2 | B=3 O=2 |
| | Weight | 40 | 48 | 78 | 95 | 113 | 171 | C=5 |
| 1 | Model Number | 18-1-3 | 18-1-4 | 18-1-6 | 18-1-8 | 18-1-10 | 18-1-12 | A=7/8 T=3/4 |
| | HR Headroom | 8-1/2 | 8-1/2 | 9-1/2 | 10-1/2 | 10-1/2 | 11-1/2 | B=3 O=2 |
| | Weight | 40 | 48 | 93 | 136 | 175 | 239 | C=5 |
| 2 | Model Number | 18-2-3 | 18-2-4 | 18-2-6 | 18-2-8 | 18-2-10 | 18-2-12 | A=7/8 T=3/4 |
| | HR Headroom | 9-1/2 | 10-1/2 | 10-1/2 | 11-1/2 | 12-1/2 | 13-1/2 | B=3 O=2 |
| | Weight | 52 | 75 | 139 | 169 | 246 | 326 | C=5 |
| 5 | Model Number | 18-5-3 | 18-5-4 | 18-5-6 | 18-5-8 | 18-5-10 | 18-5-12 | A=2 T=1-1/4 |
| | HR Headroom | 13-1/2 | 14-1/2 | 15-1/2 | 16-1/2 | 17-1/2 | 19-1/2 | B=4 O=2 |
| | Weight | 104 | 135 | 211 | 310 | 423 | 618 | C=7 |
| 7 1/2 | Model Number | 18-7 1/2-3 | 18-7 1/2-4 | 18-7 1/2-6 | 18-7 1/2-8 | | | A=2 T=1-1/4 |
| | HR Headroom | 12 | 14 | 15 | 17 | | | B=4 O=2 |
| | Weight | 125 | 185 | 315 | 475 | | | C=7 |

* 3' and 4' beams are provided with one set of bent bar hooks.

Operation

