

Spreader Beams

Model 32 – Adjustable Spreader Beams




Shown with Option C

Specify Top Rigging

PRODUCT FEATURES:

- Ideal where headroom is not limited.
- Adds stability to lift.
- Telescopic spread standard.
- Spread adjusts in 1" increments.
- Available with standard chain or wire rope rigging.
- Available with Adjust-A-Leg® rigging for off center load adjustment (minimum lifting capacity will be approximately 10-15% of beam rating).
- Wide range of additional sizes and capacities available.
- Complies with ASME standards.

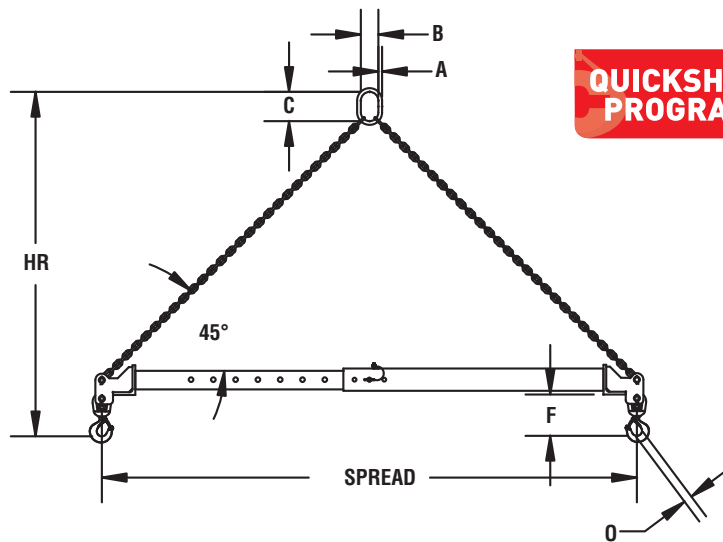

QUICKSHIP PROGRAM

SPECIFICATIONS

Capacity (tons)	Model Number	Spread (ft.) Min./Max.	HR Headroom Min./Max. w/chain (in.)	Weight Beam & Hooks (lbs.)	A Oblong Dia. (in.)	B Oblong Width (in.)	C Oblong Height (in.)	F - Hook To Beam Bottom (in.)	O - Hook Opening w/latch (in.)	Chain Rigging Weight (lbs.)
2	32-2-4/6	4 / 6	48/57	70	1/2	2.36	3.94	5.5	0.97	9
	32-2-6/10	6 / 10	72/88	85						13
	32-2-8/14	8 / 14	96/113	175						17
	32-2-12/20	12 / 20	132/166	245						23
5	32-5-4/6	4 / 6	55/64	105	1	5.38	7.09	8.4	1.41	34
	32-5-6/10	6 / 10	79/95	160						47
	32-5-8/14	8 / 14	102/126	205						61
	32-5-12/20	12 / 20	138/172	670						82
10	32-10-4/6	4 / 6	60/69	130	1-1/4	5.71	10.83	10.6	1.78	49
	32-10-6/10	6 / 10	74/111	175						69
	32-10-8/14	8 / 14	108/132	460						88
	32-10-12/20	12 / 20	144/163	680						118
15	32-15-4/6	4 / 6	64/72	165	1-1/2	5.90	10.5	13.6	2.22	78
	32-15-6/10	6 / 10	87/104	365						111
	32-15-8/14	8 / 14	111/135	478						145
	32-15-12/20	12 / 20	147/180	700						194

TOP RIGGING OPTIONS

OPTION C

Chain top rigging from beam to crane hook with coupler attachment.

OPTION W

Wire rope top rigging from beam to crane hook. WR Lug required for 25-40 TON capacity beams.