


# Spreader Beams

## Model 30 – Fixed Spreader Beams

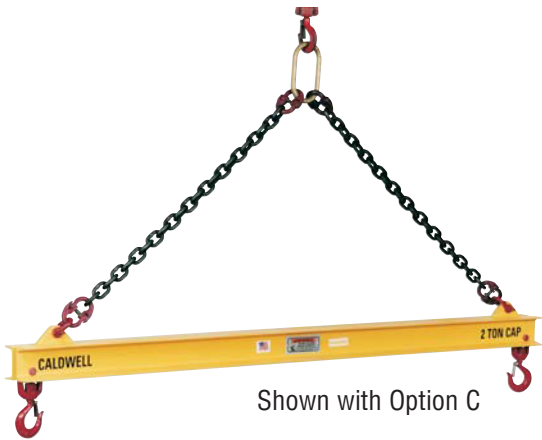


Shown with Option C  
Specify Top Rigging

**QUICKSHIP PROGRAM**

### PRODUCT FEATURES:

- Ideal where headroom is not limited.
- Adds stability to lift.
- Available with standard chain or wire rope rigging.
- Available with Adjust-A-Leg® rigging for off center load adjustment (minimum lifting capacity will be approximately 10-15% of beam rating).
- Wide range of additional sizes and capacities available.
- Complies with ASME standards.

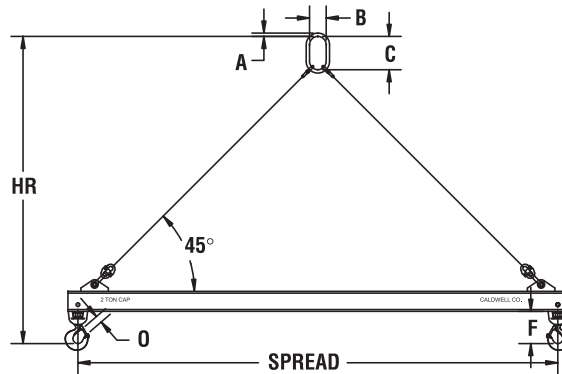

### SPECIFICATIONS

Capacity (tons)	Model Number HR Headroom (in.) Weight (lbs.)	Spread (feet)								Other Dimensions (in.)	
		4	6	8	10	12	16	20	24		
2	<b>Model Number</b>	<b>30-2-4</b>	<b>30-2-6</b>	<b>30-2-8</b>	<b>30-2-10</b>	<b>30-2-12</b>	<b>30-2-16</b>	<b>30-2-20</b>	<b>30-2-24</b>	A=1/2	F=4-1/4
	HR Headroom	34	46	58	70	82	106	132	156	B=2-1/2	O=31/32
	Weight	45	60	82	95	115	225	408	445	C=5	
5	<b>Model Number</b>	<b>30-5-4</b>	<b>30-5-6</b>	<b>30-5-8</b>	<b>30-5-10</b>	<b>30-5-12</b>	<b>30-5-16</b>	<b>30-5-20</b>	<b>30-5-24</b>	A=1	F=6
	HR Headroom	37	49	61	73	83	110	134	158	B=3-1/2	O=1-1/16
	Weight	62	78	100	117	168	305	435	661	C=7	
10	<b>Model Number</b>	<b>30-10-4</b>	<b>30-10-6</b>	<b>30-10-8</b>	<b>30-10-10</b>	<b>30-10-12</b>	<b>30-10-16</b>	<b>30-10-20</b>	<b>30-10-24</b>	A=1-1/4	F=8-1/8
	HR Headroom	41	53	64	77	86	113	138	163	B=4-3/8	O=1-1/2
	Weight	100	122	156	180	240	380	532	915	C=8-3/4	
15	<b>Model Number</b>	<b>30-15-4</b>	<b>30-15-6</b>	<b>30-15-8</b>	<b>30-15-10</b>	<b>30-15-12</b>	<b>30-15-16</b>	<b>30-15-20</b>	<b>30-15-24</b>	A=1-1/2	F=9-1/4
	HR Headroom	43	55	65	80	92	116	140	167	B=5-1/4	O=1-3/4
	Weight	126	155	185	242	270	420	665	953	C=10-1/2	
20	<b>Model Number</b>	<b>30-20-4</b>	<b>30-20-6</b>	<b>30-20-8</b>	<b>30-20-10</b>	<b>30-20-12</b>	<b>30-20-16</b>	<b>30-20-20</b>	<b>30-20-24</b>	A=1-3/4	F=9-3/4
	HR Headroom	46	58	69	82	94	118	140	170	B=6	O=2
	Weight	170	200	233	315	350	540	775	1341	C=12	
30	<b>Model Number</b>		<b>30-30-6</b>	<b>30-30-8</b>	<b>30-30-10</b>	<b>30-30-12</b>	<b>30-30-16</b>	<b>30-30-20</b>		A=1-3/4	F=9-3/4
	HR Headroom		60	70	83	95	120	145		B=6	O=2
	Weight		285	402	440	530	888	1390		C=12	
40	<b>Model Number</b>		<b>30-40-6</b>	<b>30-40-8</b>	<b>30-40-10</b>	<b>30-40-12</b>	<b>30-40-16</b>			A=2	F=13
	HR Headroom		65	77	89	102	127			B=7	O=2-3/4
	Weight		563	695	781	1058	1364			C=14	

NOTE: Weight = Beam and hooks only - (no top rigging).

### TOP RIGGING OPTIONS

#### OPTION C

Chain top rigging from beam to crane hook.

#### OPTION W

Wire rope top rigging from beam to crane hook.

#### OPTION A

Adjust-A-Leg® sling top rigging for off-center load adjustment (not included in QUICKSHIP Program).